



Eagle Eye Compact Bridge

304+, 305, 305+, 406+, 506+

The Brivo Eagle Eye Bridge acts as a gateway from your premises to the Brivo Eagle Eye Cloud Data Center, where your video is stored and managed by Brivo Eagle Video. It provides a secure connection, video buffering, bandwidth management, and monitoring of cameras.

These small-form-factor bridges are suitable for applications with up to 50 4 MP cameras when a server rack is not available. They can be wall or shelf-mounted. This family of bridges is equipped with ruggedized, all-aluminum enclosures designed to operate in a broad ambient temperature range. These bridges include a display screen providing operational status at a glance. Some models include POE ports for direct camera connection, and the 304+, 305+, 406+, and 506+ also support AI processing for advanced Brivo Eagle Eye License Plate Recognition (LPR).



System Administration

- 100% browser-based; no software necessary
- Granular user permissions for enhanced security
- Multisite support to ensure complete coverage across all of your locations
- Point-and-click video sharing for optimized incident communication
- Centralized management provides a single hub to access all of your cameras

Recording Features

- Video encrypted in transit and at rest
- Fully cloud managed
- Intelligent Bandwidth Management with local buffering
- Motion or continuous recording
- Optional audio recording

Web Interface & Mobile Features

- Native iOS and Android apps
- View live and recorded video
- Compatible with all modern browsers
- Motion detection with alerts
- Map and floorplan display

What is Brivo Eagle Eye Video?

Brivo Eagle Eye Video is a fully managed cloud video surveillance solution, delivering an end-to-end video management system that's simple to deploy and easy to use. It supports all modern browsers and works on Windows, Mac, and even Linux with no plugins to install. With our fully mobile capabilities, you can view video anytime, anywhere. The fully functional iOS and Android applications provide complete access to live and recorded video and can also be used to install, configure, and manage the system.

Brivo provides a cloud-based video management system. The Brivo Eagle Eye Bridge is installed on-site, connects to your cameras, records video locally, and then securely synchronizes both video and metadata to the Brivo Eagle Eye Cloud Data Center. It's a robust, secure appliance specifically designed to overcome the demands of transmitting high-resolution video through the internet.


Comprehensive Camera Support

At Brivo, we believe camera compatibility is important. There's no need to be locked into a single camera vendor. Businesses need the flexibility to work with the cameras that they choose. Brivo Eagle Eye Bridges and CMVRs support ONVIF Profile S IP cameras. Combo Bridges and CMVRs support both IP and NTSC and PAL analog cameras.

Security Simplified

With Brivo Eagle Eye Complete Privacy Encryption™, video is fully encrypted during transmission and at rest. The Brivo Eagle Eye Bridge has no open ports to the Internet, eliminating security vulnerabilities commonly found in other systems and eliminating the need for router or firewall adjustments.

BRIVO EAGLE EYE COMPACT BRIDGE SPECIFICATIONS

					
MODEL	Bridge 304+	Bridge 305 (Japan only)	Bridge 305+	Bridge 406+	Bridge 506+
Max Cameras*	Up to 20 IP Cameras @4MP	Up to 12 IP Cameras @4MP, 4 POE	Up to 20 IP Cameras @4MP, 8 POE	Up to 35 IP Cameras @4MP	Up to 50 IP Cameras @4MP
Max Analytic Count**	5	5	5	15	20
LPR Support**	Yes	No	Yes	Yes	Yes
Video Buffer	2 days on premise	2 days on premise	2 days on premise	2 days on premise	2 days on-premises
POE Camera Ports	None	4 ports, Class 3	8 ports, Class 3	None	None
Network Ports	Dual Gigabit	1 Gigabit, 4 × 100 Megabit	1 Gigabit, 8 × 1 Gigabit	Dual Gigabit	Dual Gigabit
Video Output**	HDMI (1), DP (1)	HDMI (1), DP (1)	HDMI (1), DP (1)	HDMI (1), DP (1)	HDMI (2), DP (2)
Dimension	180 × 127 × 64 mm 7.08 × 5.00 × 2.50 in	172 × 127 × 75mm 6.75 × 5.01 × 3.00 in	229 × 127 × 83 mm 9.00 × 5.00 × 3.25 in	180 × 127 × 64 mm 7.08 × 5.00 × 2.50 in	229 × 130 × 100 mm 9.02 × 5.12 × 3.94 in
Weight	1.20 kg 2.65 lbs	1.32 kg 2.90 lbs	2.39 kg 5.27 lbs	1.25 kg 2.77 lbs	1.75 kg 3.85 lbs
Maximum Power Consumption	External 100–240 VAC, 20 W	External 100–240 VAC, 22 W	External 100–240 VAC, 22 W	External 100–240 VAC, 30 W	External 100–240 VAC, 40 W
POE Maximum Power Budget	N/A	60 W	72 W	N/A	N/A
Operating Temperature Range	-10–50 °C 14–122 °F	-10–50 °C 14–122 °F	-10–50 °C 14–122 °F	-10–50 °C 14–122 °F	-10–50 °C 14–122 °F
Operating Humidity Range	0–70%	0–70%	0–70%	0–70%	0–70%
Certifications	FCC, CE, UKCA, NOM, NYCE, RCM, WEEE, SGS, BIS, RoHS	FCC, UL, PSE, CE, REACH, RoHS, C-Tick	FCC, CE, UKCA, NOM, NYCE, RCM, WEEE, SGS, BIS, RoHS	FCC, CE, UKCA, NOM, NYCE, RCM, WEEE, SGS, BIS, RoHS	FCC, CE, UKCA, NOM, NYCE, RCM, WEEE, SGS, BIS, RoHS
Brivo Eagle Eye Rapid Replacement Part Number	EN-RR304p-1 (Monthly) EN-RR304p-12 (Yearly)	EN-RR305-1 (Monthly) EN-RR305-12 (Yearly)	EN-RR305p-1 (Monthly) EN-RR-305p-12 (Yearly)	EN-RR406p-1 (Monthly) EN-RR406p-12 (Yearly)	EN-RR506p-1 (Monthly) EN-RR506p-12 (Yearly)

* Typical - please utilize the Brivo Eagle Eye Bridge Wizard for precise capacity.

** If using LPR, see the Brivo Eagle Eye License Plate Recognition Data Sheet for all bridge specs.

Network Features

- Automatic network configuration
- Secure camera network (dual network ports)
- No inbound connections needed
- Packet loss detection/reporting
- Network disconnected alerts

Management Features

- Remote management
- Automatic camera discovery
- Automatic camera configuration
- Advanced motion detection
- Local video buffering
- Configuration synced to Cloud
- Camera trouble alerts
- Internet outage alerts
- Fully cloud managed


Standard Support (Included)

- Free of charge with an active subscription
- Bridge — no cost replacement, CMVR; 3-year warranty
- 24/7 email and web support
- 8 am to 6 pm phone support

Brivo Eagle Eye Rapid Replacement and Extended Warranty (Recommended)

Brivo's comprehensive program for hardware warranty and upgrades.

- Extends warranty up to 20 years
- Full equipment upgrade every 6 years upon request
- 24/7 priority support via phone, email, and web
- Overnight cross shipping of warranty replacement if needed

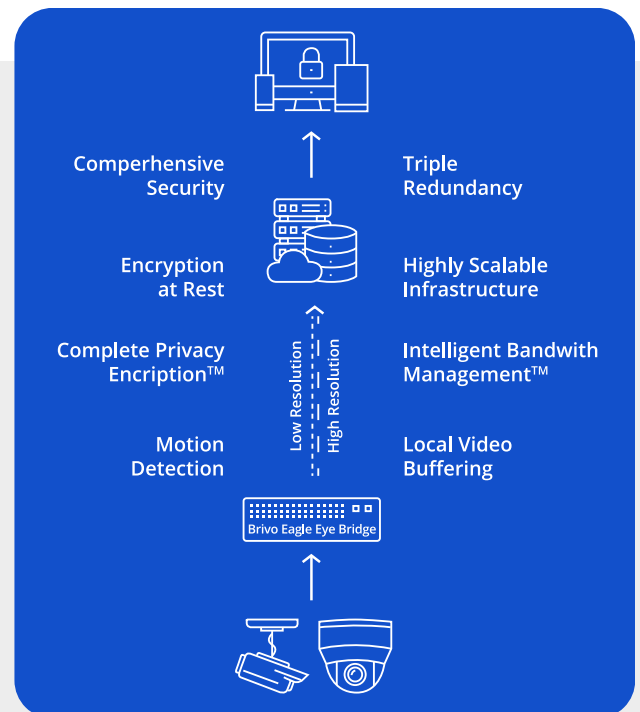

Contact us at brivo.com or call us at 866.692.7486 to learn more.